



Socay 8KP100CA Bi-Directional TVS Axial Lead Transient Voltage Suppressors

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: Socay
- Certification: UL, REACH, RoHS, ISO
- Model Number: 8KP100CA
- Minimum Order Quantity: 250PCS
- Price: Negotiable
- Delivery Time: 5-8 work days



Product Specification

- Product Name: TVS Diodes
- Package Type: R6/P600
- Reverse Stand-Off Voltage: 100.0V
- Breakdown Voltage@It Min: 111.0V
- Breakdown Voltage@It Max: 123.0V
- Tact Current: 5mA
- Maximum Clamping Voltage@Ipp: 162.0V
- Maximum Peak Pulse Current: 50.0A
- Maximum Reverse Leakage@Vrwm: 5μA
- Storage Temperature Range: -55 To +150

for more products please visit us on socaydiode.com

Product Description

Socay 8KP100CA Bi-Directional TVS Axial Lead Transient Voltage Suppressors

DATASHEET: 8KP Series_v2309.1.pdf

8KP100CA TVS Diode Profile:

The 8KP series is designed to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

8KP100CA TVS Diode Application:

TVS devices are suitable for protecting I/O interfaces, Vcc buses, and other vulnerable circuits used in Telecom, Computer, Industrial, and Consumer electronic applications.

8KP100CA TVS Diode Feature:


- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- Fast response time
- RoHS compliant
- Glass passivated chip junction in P600 Package
- 8000W Peak power capability at 10 × 1000μs waveform Repetition rate (duty cycle):0.01%

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation with a 10/1000μs waveform (Fig.1)(Note 1), (Note 2)	P_{PPM}	8000	Watts
Peak Pulse Current with a 10/1000μs waveform.(Note1, Fig.3)	I_{PP}	See Next Table	Amps
Power Dissipation on Infinite Heat Sink at $T_L=75^{\circ}\text{C}$	$P_{M(AV)}$	8.0	Watt
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)	I_{FSM}	500	Amps
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-55 to +150	$^{\circ}\text{C}$



Electrical Characteristic

Part Number		Reverse Stand-Off Voltage V_{RWM} (V)	Breakdown Voltage V_{BR} (V) @ I_T		Test Current I_T (mA)	Maximum Clamping Voltage V_C (V) @ I_{PP}	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage I_R (μA) @ V_{RWM}
Uni	Bi		MIN	MAX				
8KP51A	8KP51CA	51	56.7	62.7	5	82.4	97.1	5
8KP58A	8KP58CA	58	64.4	71.2	5	93.6	86.5	5
8KP60A	8KP60CA	60	66.7	73.7	5	96.8	83.7	5
8KP64A	8KP64CA	64	71.1	78.6	5	103.0	78.6	5
8KP70A	8KP70CA	70	77.8	86.0	5	113.0	71.7	5
8KP75A	8KP75CA	75	83.3	92.1	5	121.0	66.9	5
8KP78A	8KP78CA	78	86.7	95.8	5	126.0	64.3	5
8KP85A	8KP85CA	85	94.4	104.0	5	137.0	59.1	5
8KP90A	8KP90CA	90	100.0	111.0	5	146.0	55.5	5
8KP100A	8KP100CA	100	111.0	123.0	5	162.0	50.0	5

Functional Diagram

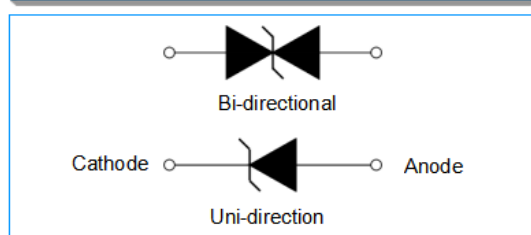

I-V Curve Characteristics

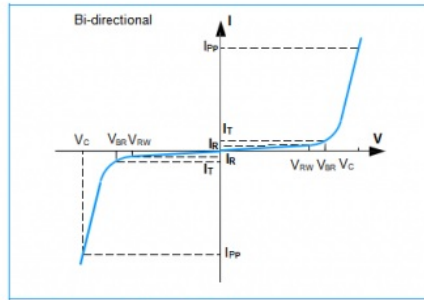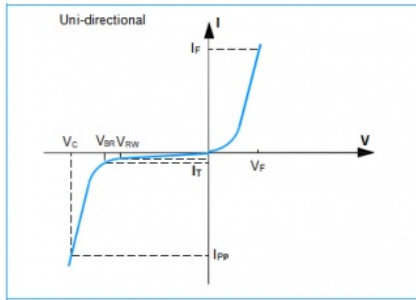


Physical Specifications

Weight	0.007 ounce, 0.21 gram
Case	JEDEC DO-214AB Molded Plastic over glass passivated junction
Polarity	Color band denotes cathode except Bipolar
Terminal	Matte Tin-plated leads, Solderable per JESD22-B102D

Environmental Specifications


Temperature Cycle	JESD22-A104
Pressure Cooker	JESD22-A102
High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Thermal Shock	JESD22-A106

Soldering Parameters

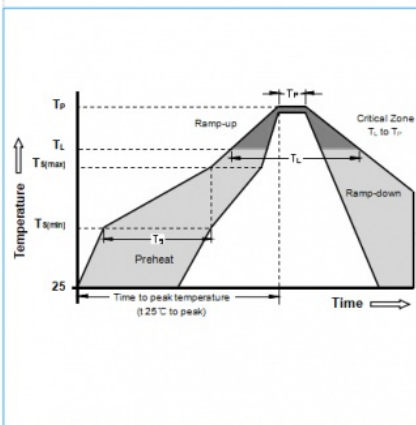


Reflow Condition		Lead-free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (T_s)	60 - 180 Seconds
Average ramp up rate (Liquidus Temp T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Time (min to max) (T_L)	60 - 150 Seconds
Peak Temperature (T_P)		260 +0/-5°C
Time within 5 °C of actual peak Temperature (t_p)		20 - 40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max
Do not exceed		260°C

Dimensions

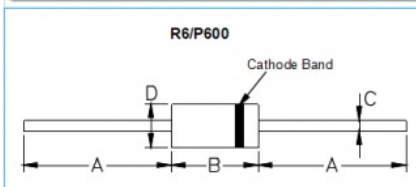


Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	1.000	-	25.40	-
B	0.340	0.360	8.64	9.14
C	0.048	0.052	1.22	1.32
D	0.340	0.360	8.64	9.14

Part Numbering

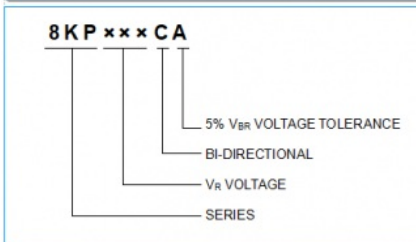

Part Marking

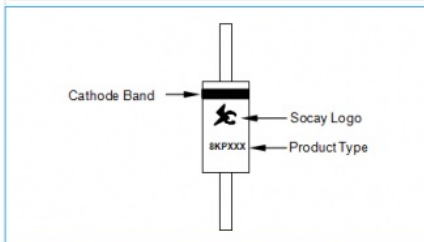

Packaging			
Part Number	Component Package	Quantity	Packaging Option
8KP Series	R6/P600	250 PCS	Box
Packaging Dimensions Unit: Inches (Millimeters)			

NOTICE:
 SOCAY owns the rights to several patents, trademarks, copyrights, trade secrets, and other intellectual property.

SOCAY reserves the right to modify any products without prior notice.
 SOCAY does not provide any warranties or representations regarding the suitability of its products for any specific purpose and disclaims any liability.

The parameters listed in the SOCAY datasheet may vary depending on the application, and actual performance may change over time. It is the responsibility of the customer's technical expert to verify all operating parameters before application.
 We disclaim any and all responsibilities and liabilities if any item under this notice of warning is not complied with.